


Front Suspension

Illustrated Index

Overall Suspension

CAUTION: Replace the self-locking nuts after removal.

NOTE: Wipe off the grease before tightening the nut at the ball joint.

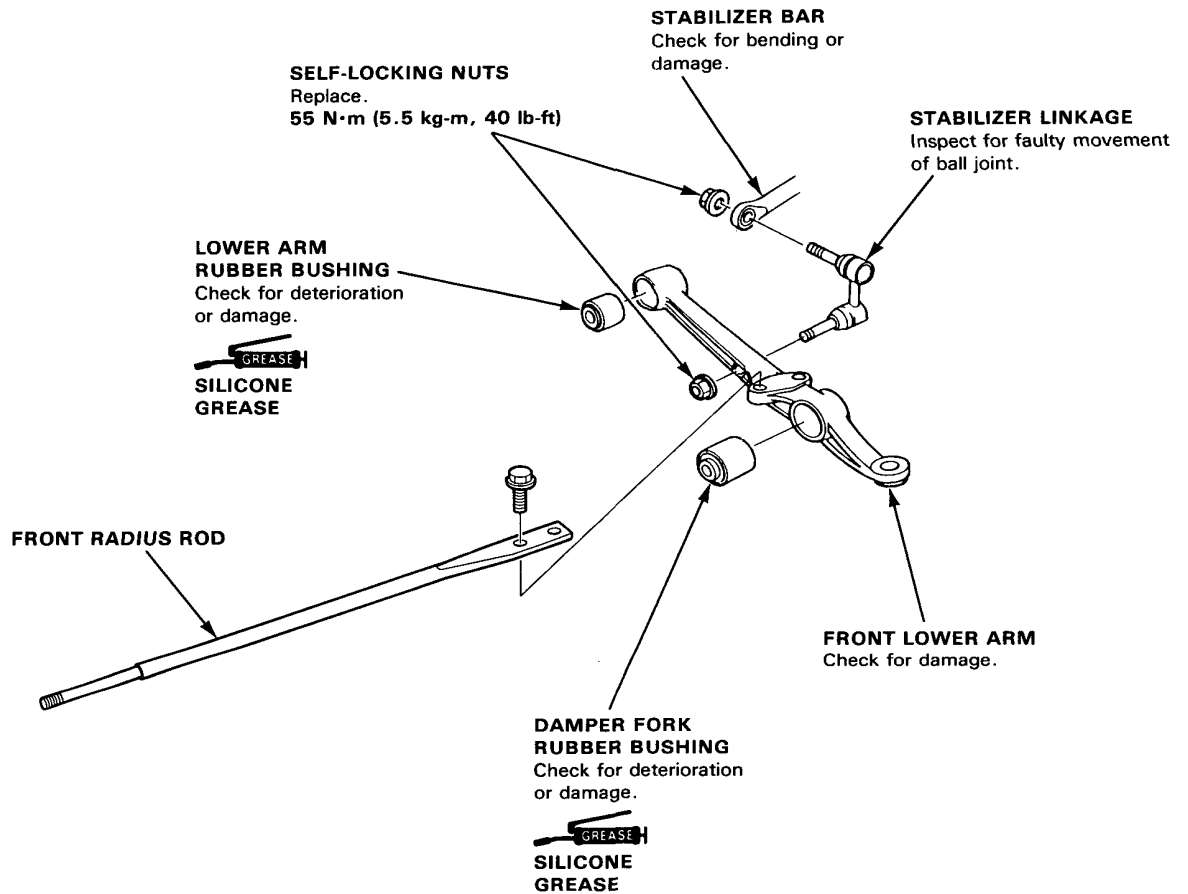

CAUTION: The vehicle should be on the ground before any bolts or nuts connected to rubber mounts or bushings are tightened.