


# Front Suspension

## Illustrated Index

### Overall Suspension

**CAUTION:** Replace the self-locking nuts after removal.

**NOTE:** Wipe off the grease before tightening the nut at the ball joint.

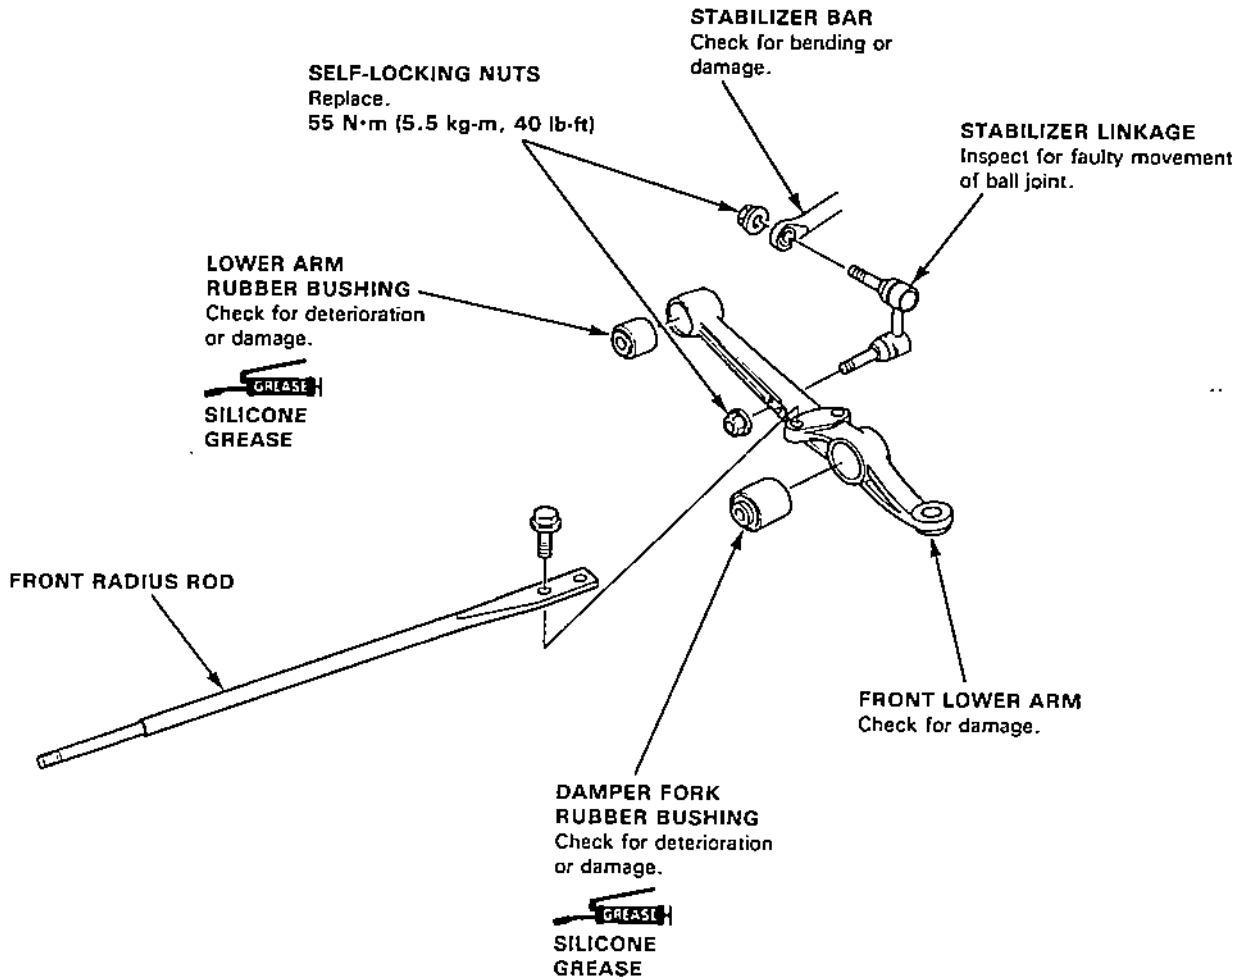

**CAUTION:** The vehicle should be on the ground before any bolts or nuts connected to rubber mounts or bushings are tightened.